

**INSTALLATION INSTRUCTIONS**  
**for the**  
**SWITCH S13**  
**for the**  
***Kodak RP X-Omat* STANDBY CONTROL,**  
**MODEL M6A-N**  
**Service Code: 3017**



**Important**

Qualified service personnel must install this component.



---

**PLEASE NOTE**

The information contained herein is based on the experience and knowledge relating to the subject matter gained by Eastman Kodak Company prior to publication.

No patent license is granted by this information.

Eastman Kodak Company reserves the right to change this information without notice, and makes no warranty, express or implied, with respect to this information. Kodak shall not be liable for any loss or damage, including consequential or special damages, resulting from any use of this information, even if loss or damage is caused by Kodak's negligence or other fault.



This equipment includes parts and assemblies sensitive to damage from electrostatic discharge. Use caution to prevent damage during all service procedures.


---

**The Kit includes:**

Part No.	Description	Quantity
6E8627	SWITCH S13	1
7C8228	PLATE	1
9B8939	INSTALLATION INSTRUCTIONS	1

---

## Installing the New SWITCH S13

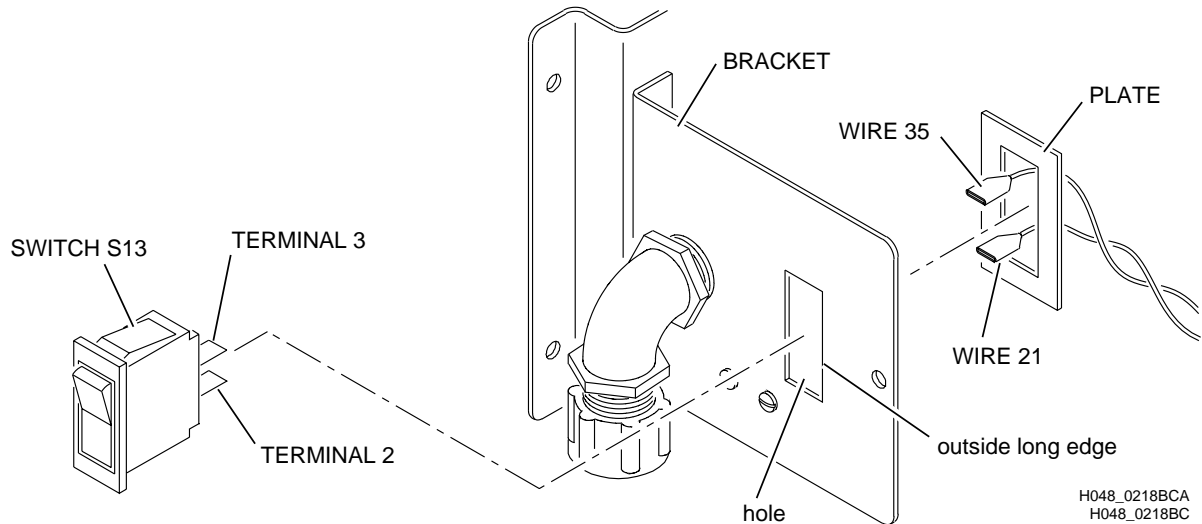

### Warning

Dangerous Voltage

- [1] De-energize the PROCESSOR.
- [2] Disconnect from SWITCH S13:
  - wire 35 from the OPEN TERMINAL
  - wire 21 from the COMMON TERMINAL
- [3] Remove from the BRACKET:
  - SWITCH S13 - discard
  - PLATE - discard



### Important

- The existing SWITCH S13 is not available.
  - The new SWITCH S13 is larger, you must use a FILE to increase the size of the hole.
- [4] Use a FILE on the outside long edge of the hole in the BRACKET to increase the size by approximately 3 mm (1/8 in.).
  - [5] Install on to the BRACKET:
    - new SWITCH S13 - snap into position
    - new PLATE - snap into position
  - [6] Connect:
    - wire 35 to TERMINAL 2
    - wire 21 to TERMINAL 3
  - [7] Remove the debris.

---

## Checking the Operation



### Warning

Dangerous Voltage

- [1] Energize the system.
- [2] Check that the equipment operates correctly.

## Publication History

Publication Date	Publication No.	ECO No.	Changed Pages	File Name	Notes
08DEC97	9B8939	---	All	9B8939.fm	New Publication
05APR04	9B8939	--	3	9B8939.fm	Revised

*Kodak and X-Omat are trademarks.*